



INFRARED THERMOMETER FT3700-20/ FT3701-20

Environmental Measuring Instruments



Non-contact infrared thermometer featuring simple, one-touch measurement



Choose according to
your measurement
location.

Two Models

FT3700-20

Distance : Spot

12 : 1

Long-focus

For measuring temperature
over a wide area

FT3701-20

Distance : Spot


30 : 1

Long-focus, Precise-field

For measuring temperature
at a single point

Identify the
measurement
location reliably.

Two-point laser marker

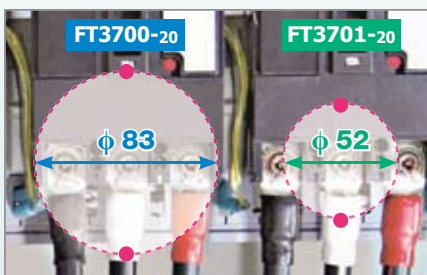

Measure the average
temperature inside a
circle whose diameter
is defined by the two
indicated points.

Example of a circuit-breaker
(At a distance of approx. 1 m)



Bright



ISO 9001
JMI-0216



ISO14001
JQA-E-90091



www.hioki.com

HIOKI company overview, new products, environmental considerations
and other information are available on our website.



Simulated measurement

Easily measure temperature in hazardous or unreachable locations



Useful Functions

- MAX, MIN, DIF (MAX-MIN), AVG measurement
- Alarm function
- Emissivity (ϵ) can be set based on the measurement target
- Continuous measurement
- Backlight



Specifications

(Accuracy guaranteed for 1 year)

	FT3700-20	FT3701-20
Measurement temperature range	-60.0 to 550.0 °C (-76 to 1022 °F) Guaranteed accuracy range is -35 to 500°C. (-31.0 to 932.0 °F)	-60.0 to 760.0 °C (-76 to 1400 °F) Guaranteed accuracy range is -35 to 500°C. (-31.0 to 932.0 °F)
Accuracy	-60.0 to -35.1 °C (-76.0 to -31.1 °F) : Accuracy not specified -35.0 to -0.1 °C (-31.0 to 31.9 °F) : $\pm 10\% \text{rdg.} \pm 2 \text{ } ^\circ\text{C}$ 0.0 to 100.0 °C (-32.0 to 212.0 °F) : $\pm 2 \text{ } ^\circ\text{C}$ 100.1 to 500.0 °C (212.1 to 932.0 °F) : $\pm 2\% \text{rdg.}$ 500.1 to 550.0 °C (932.0 to 1022 °F) (FT3700-20) 500.1 to 760.0 °C (932.0 to 1400 °F) (FT3701-20) : Accuracy not specified	
Accuracy guarantee for temperature and humidity	23 °C $\pm 3 \text{ } ^\circ\text{C}$ (73 °F $\pm 5 \text{ } ^\circ\text{F}$) 80% RH or less (non-condensating)	
Temperature coefficient	Measurement accuracy $\times 0.1/ \text{ } ^\circ\text{C}$	
Response time	1 second (90%)	
Diameter of field of measurement	83 mm at 1000 mm (Distance : Spot = 12 : 1)	100 mm at 3000 mm (Distance : Spot = 30 : 1)
Detection element	Thermopile	
Sighting	Two-point laser marker Max 1mW (class 2), Red	
Measurement wavelength	8 to 14 μm [Thermal emissivity compensation]0.10 to 1.00 by steps of 0.01	
Additional Functions	MAX/ MIN/ DIF (MAX-MIN)/ AVG measurement, Alarm function, Backlight function	
Operating temperature and humidity	0 to 50 °C (32 °F to 122 °F), 80%RH or less (non-condensating)	
Storage temperature and humidity	-10 to 50 °C (14 °F to 122 °F), 80%RH or less (non-condensating) 50 to 60 °C (122 °F to 140 °F), 70%RH or less (non-condensating)	
Applicable standards	EMC : EN61326 Laser : IEC60825-1 CLASS 2 LASER	
Power supply	LR03 alkaline battery $\times 2$ [Continuous operating time: Approx. 140 hours](When laser marker and backlight are OFF)	
Dimensions	Approx. 48 W \times 172 H \times 119 D mm (1.89" W \times 6.77" H \times 4.69" D)(excluding projections)	
Mass	Approx. 256 g (9.0 oz.) (including LR03 alkaline battery $\times 2$)	
Accessories	Instruction manual, LR03 alkaline battery $\times 2$ (supplied with this product for initial use only), Carrying case $\times 1$	

Measurement focus

D : Distance (mm) S : Spot (mm)

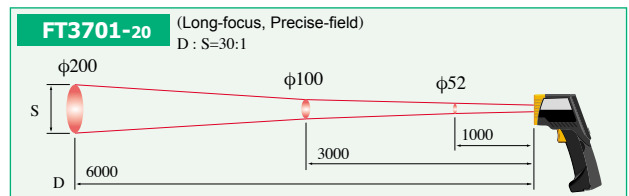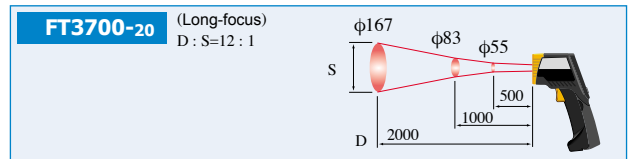

INFRARED THERMOMETER FT3700-20

Long-focus

INFRARED THERMOMETER FT3701-20

Long-focus, Precise-field

Option

BLACK BODY TAPE

(50mm \times 10m, 1 roll) Withstands 180°C $\epsilon=0.95$



*Optional use of black body tape allows increased emissivity in order to obtain accurate temperature measurements on low-emissivity materials such as metals.



Laser Product Caution Notice

A caution label is attached to the thermometer. Be sure to observe the operating precautions on the label.

Related Products

Use a Temperature HiTester with output for continuous temperature measurement applications.

- Measure a broad range of temperatures quickly and accurately at a resolution of 0.1°C.
- Use the optional INTERFACE PACK 3909 to output measurement data in real time for use by a recorder or computer.



TEMPERATURE HiTESTER 3444
(With real-time output, narrow field measurement type)

TEMPERATURE HiTESTER 3445
(With real-time output, fine surface measurement)

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

HIOKI

HIOKI E. E. CORPORATION

Headquarters :

81 Koizumi, Ueda, Nagano, 386-1192, Japan
TEL +81-268-28-0562 FAX +81-268-28-0568
http://www.hioki.co.jp / E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION :

TEL +1-609-409-9109 FAX +1-609-409-9108
http://www.hiokiusa.com / E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) Sales & Trading Co., Ltd. :
TEL +86-21-63910090 FAX +86-21-63910360
http://www.hioki.cn / E-mail: info@hioki.com.cn

Beijing Office : TEL +86-10-84418761
FAX +86-10-84418763 / E-mail: info-bj@hioki.com.cn

Guangzhou Office : TEL +86-20-38392673
FAX +86-20-38392679 / E-mail: info-gz@hioki.com.cn

Shenzhen Office : TEL +86-755-83038357
FAX +86-755-83039160 / E-mail: info-sz@hioki.com.cn

HIOKI INDIA PRIVATE LIMITED :
TEL +91-731-6548081 FAX +91-731-4020083
E-mail: info@hioki.in

HIOKI SINGAPORE PTE. LTD. :
TEL +65-6634-7677 FAX +65-6634-7477
E-mail: info@hioki.com.sg

DISTRIBUTED BY

(주)누빅콤

서울본사
서울특별시 영등포구 경인로 775(문래동 3가, 예이스하이테크시티 3동 201호)
TEL: 070-7872-0701 FAX: 02-2167-3801
E-mail: sales@nubicom.co.kr

고객지원센터
TEL: 070-7872-0701, 080-801-7880 FAX: 02-2167-3802
E-mail: oft@nubicom.co.kr

대전 사무소
대전광역시 유성구 대덕대로 593(도룡동 386-2) 대덕테크비즈센터 203호
TEL: 070-7872-0712 FAX: 042-863-2023
E-mail: inyeom@nubicom.co.kr